

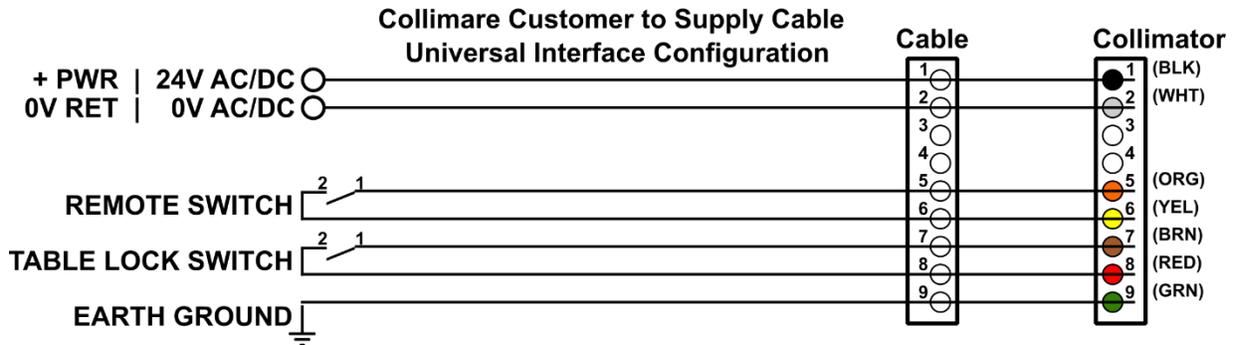


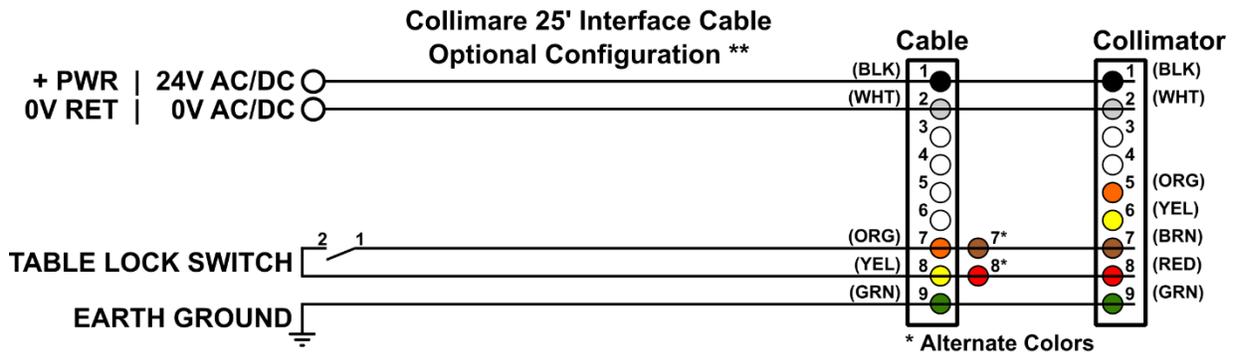

## INTERFACE CABLE WIRING DIAGRAM – LED BOARD VERSION B2

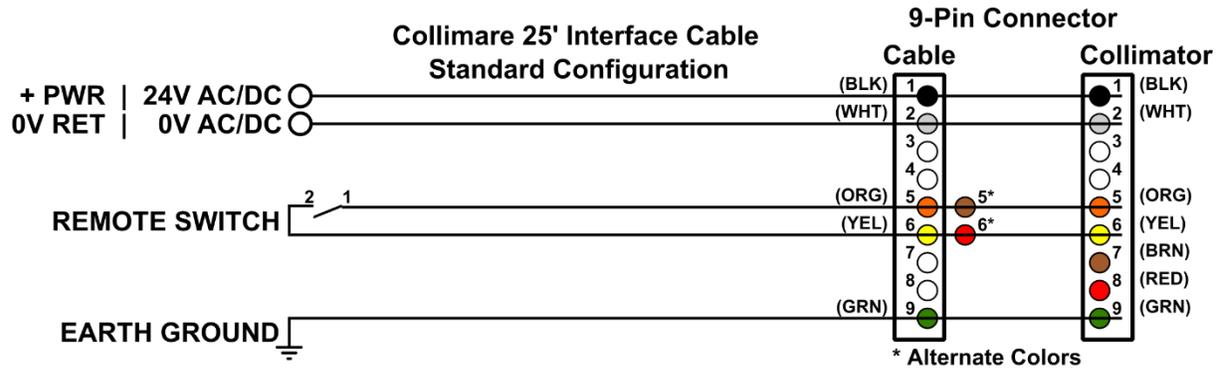

### 4.4.8 Collimator 25' Interface Cable Wiring Diagram – Version B

#### Optional Configuration – Enabling Table Lock:

Remove the External Switch Wires (Pins 5 and 6) from the 9-Pin Connector and insert them into Pins 7 and 8.

#### Board Polarity:

**CAUTION!** LED Board Version B is polarized.

+24V PWR must be wired to Black (Pin 1).

0V RET must be wired to White (Pin 2).

#### Alternate Wire Colors:

Some 25' Interface Cables will have Red and Brown wires instead of Yellow and Orange.

